




ENERGIS



ENERGIS

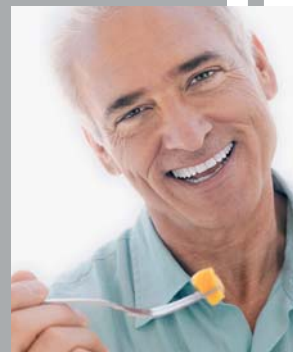

ISECO, to enjoy nice and healthy food.

Therefore, the preservation of food quality as well as the pleasure and safety of your customers will always remain at the heart of our concerns.

Regeneration of meals giving quality and flexibility of product

Energis, a user-friendly oven for dining rooms or community restaurants : retirement homes, health centres and similar venues. Energis perfectly meets the hygienic requirements for Cook & Chill. With its refined design, the Energis can integrate any dining room or regeneration facility.

ENERGIS COMPACT



THE RANGE

Energis and Energis Compact are available with 4, 6, 8 or 12 shelves.



Optional Energis Stand

- **Simple to use and a quality performance**

With a possible choice of up to 4 different temperatures pre-set for each shelf, Energis can adapt to the demand of all menu requirements and to any type of containers (porcelain, stainless steel or foil).

Load it, make your selection and it will do the rest !!!

It is thus possible to regenerate, during the same cycle, different food types, whether in bulk or individual tray.

Delicate fish fillet, rare meat and crusty food can all be regenerated at once, with no need for surveillance and a high quality result.

At the end of the cycle, the stability of ISECO's Thermocontact heating shelves ensures a service at the correct temperature with great reliability and user safety.

- **Hygiene**

Cleaning is made easy with the entire Thermocontact shelves block pivoting out for complete accessibility to the oven cavity.

- **Energy saving**

Each Thermocontact shelf is individually regulated thus consuming only the necessary power supply.

- **Continuous monitoring**

The onboard control panel displays the temperature in the cavity in real time as well as the time left in the regeneration cycle and any interruption in the cycle.



- **Thermocontact**

The Thermocontact regenerating system invented and always improved by ISECO is the only system allowing soft regeneration for a perfect result.



Optional Energis Stand



Technical characteristics

Models	ENERGIS 4	ENERGIS 6	ENERGIS 8	ENERGIS 12	ENERGIS Compact 4	ENERGIS Compact 6	ENERGIS Compact 8	ENERGIS Compact 12
Number of shelves	4	6	8	12	4	6	8	12
Shelf capacity	2 GN 1/2 or 3 GN 1/3				1 GN 1/2 or 2 GN 1/3			
Containers depth (mm)	65	65	65	55	65	65	65	55
Overall depth (mm)	538	538	538	538	538	538	538	538
L (mm)	720	720	720	720	580	580	580	580
H (mm)	714	902	1090	1413	714	902	1090	1413
Power consumption at 230/400 V	3100	4600	6100	9100	2100	3100	4100	6100
230 V ~ 50 Hz	•	•	•	•	•	•	•	•
230 V 3 ~ 50 Hz	•	•	•	•	•	•	•	•
400 V 3 N ~ 50 Hz	•	•	•	•	•	•	•	•
208 - 240 V ~ 60 Hz	•	•	•	•	•	•	•	•
208-240 V 3 ~ 60 Hz	•	•	•	•	•	•	•	•

N.B. : Screw jacks allow for a height setting of +/- 14 mm.

• Options

- Stands
- Anti-tilting stand for table display
- Wall brackets
- Key locking



Energis on stand



Energis on wall bracket



*Energis on high stand for integration
of a fridge*

ISECO International
2, avenue de Kaarst • Euralliance Porte A • BP 52004 • 59777 EURAILLE FRANCE
Tél. : + 33 3 59 35 20 85 • Fax : +33 3 59 35 20 86

ISECO SAS
63 route de Chamoy • 10130 SAINT-PHAL FRANCE • Tél. +33 3 25 42 55 55 • Fax +33 3 25 42 19 59

Web site: www.iseco.fr • E-mail : contact@iseco.fr

